



Adaptabel® DC Single Stroke Bells

Explosionproof, NEMA Type 4

333EX Series

FEATURES

- > 6" and 10" gong sizes
- > Low power drain for efficient operation over long wire runs
- > Completely assembled
- > Weatherproof

AGENCY APPROVALS

- > UL 1203 Listed
- > UL Listed for Class I, Divisions 1 and 2, Groups B, C and D; Class II, Divisions 1 and 2, Groups E, F and G; and Class III
- > NEMA Type 4

SPECIFICATIONS

- > Adjustment free self-compensating plunger
- > Corrosion resistant finish

Hazardous location DC single stroke bells produce a distinctive, loud, and clear individual note that is free of mechanical clatter. When current is applied, the striker hits the gong once and stops. Current may be coded to cause the striker to hit the gong intermittently. Ideal for use with momentary initiating contacts.


Mounts to any solid surface using 3/8" (10mm) fasteners. Units fitted with a sealing fitting for 3/4" (19mm) conduit and wire leads for power connections.

Used for coded signal applications such as paging. Also specified for timing, scheduling, and general alarm applications in refineries, gasoline storage and dispensing areas, petrochemical manufacturers, spray paint areas, aircraft hangers, grain dust areas in graineries and flour mills, and industrial firms using flammable liquids.

D-04



TECHNICAL INFORMATION

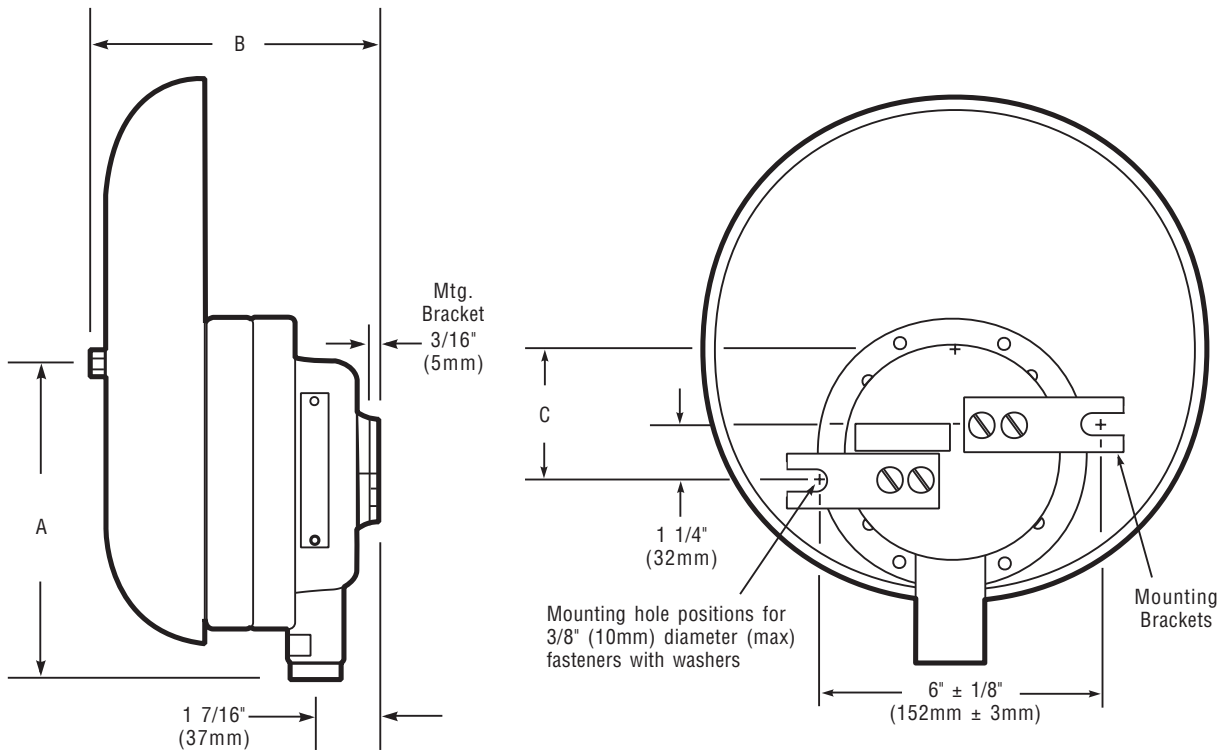

Gong Size	Dimensions		
	A	B	C
6" (152mm)	4 1/16" (103mm)	4 13/16" (122mm)	5/8" (16mm)
10" (245mm)	6 1/16" (154mm)	5 3/8" (137mm)	2 5/8" (67mm)

Cat No.	Volts	Peak Current*	dB at 1m / 10 ft.	Gong Size
333EX-6G1	24V DC	3.50A	92 / 86	6" (152 mm)
333EX-6P1	125V DC	0.52A		
333EX-10G1	24V DC	3.50A	100 / 94	10" (254 mm)

*Single pulse duration - 8 to 16 milliseconds