



LED 2 Line Message Centers

Up to 40 Characters

MC2-20R07

FEATURES

- > Two lines of 7" LED characters
- > Stores up to 81 messages
- > 100,000 hr. LED technology
- > 5 variable speed settings
- > 25 message modes
- > 10 day typical memory retention
- > Built in real-time clock, 12 or 24 hour format
- > Built in serial computer interface- RS232 and RS485
- > Addressable
- > Easy to use push button operation to set time/date and display on/off
- > Attractive ABS case design
- > Continuous message entry with automatic centering in any mode
- > Hand held remote (ordered separately)

The Edwards MC2-20R07 is designed specifically for high-priority messaging. With the message center, you can communicate critical, time-sensitive information specifically to individuals who need it - when they need it. Your messages will be received at the appropriate time, without the delay and clutter often associated with memos, bulletin board announcements and e-mail.

Because of its size, the MC2-20R07 is also suited for delivering advertising messages for products or services to customers waiting for tellers or at point-of-sale terminals. In addition, it delivers information to visitors, clients and patients in lobbies and waiting rooms.

Using light, color and motion that's guaranteed to attract attention, the MC2-20R07 lets you communicate important messages on a on-to-one basis. They can be strategically placed inside help-desk and customer service work stations/cells, offices, information desks, and lobbies so that priority data is immediately and easily available. Whether you're updating a plant supervisor with a production run change or several customer service representatives with individual call waiting/cue information, the applications for the MC2-20R07 are unlimited.

The MC2-20R07 stands directly on a desktop or counter. The units may be wall mounted using the supplied hardware. For use indoors in commercial and industrial environments.

Applications

- Display real-time system status information and alerts
- Communicate to customers in lobby/waiting areas

AGENCY APPROVALS

Safety


- > EN 60950
- > C120V power supply is UL Listed/CSA Certified

EMI

- > FCC ClassB

D-04

TECHNICAL INFORMATION

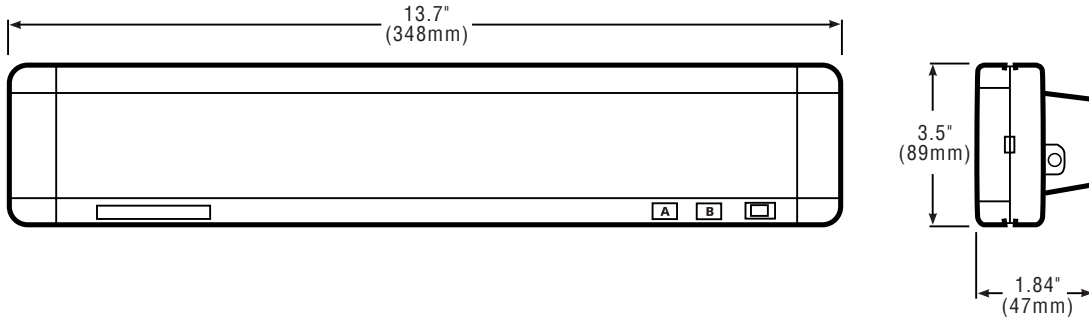

Cat. No.	Power	No. characters	Character size Array	Pixel size diameter x center to center spacing	Pixel Color	Weight	Max. viewing distance w/ largest font*	Message capacity	Operating environment	Case dimens./ display Dimens.
MC2-20R07	120V AC + 1-10% 60 Hz 35 watt max.	Min. of 40 characters standard width (2 lines of 20)	.7" Array 120 x 7 pixels per line	.07" x .1"	Red	Display 21 oz. AC Adapter 19 oz.	35 ft	81 different messages can be stored & displayed 6,000 characters	32-120°F 0-50°C	13.7" L 1.84" D 3.5"H/ 12"L 1.7"

*Fonts available Block (sans serif), decorative (serif), upper /lower case, slim, wide, double wide and international character set

- Communicate messages directly to supervisory personnel in the office, plant, shipping/receiving, etc. regarding meetings, announcements, schedule changes, policy updates, sales and quality reports and more
- Display critical real-time production information such as efficiency levels, production schedules/changes, system status information and alerts, and other select data
- Transmit emergency announcements, department objectives, financial and sales goals, weather updates, etc.
- Communicate operation instructions

Hand Held Remote Programmer (ordered separately)

A 54 key hand held remote control keyboard including batteries with easy to understand programming instructions is available — MC-RP

Accessories

Infrared Message Loader with 3 foot cable and 9V battery — MC-RIRL

For Message Center Software & Hardware Accessories please see pages 7-18 to 7-25.