



Call For Assistance Catalog

Emergency Communication Products



Minutes Matter

"I rest easier knowing that Edwards devices are installed throughout the Assisted Living Center that I manage.

Those pull cords and call for assistance stations can become a lifeline for our residents in urgent need of help after a fall or other unexpected emergency.

When every minute matters, I choose Edwards."



Call for Assistance

Table of Contents


Description	Page
Call for Assistance Kits	
.....CFA Series	4
Hotel Room Annunciator	
.....CFA Series	6
Push Buttons	
Push Button Plate.....147 Series	7
Horn/Strobe	
.....CFA Series	8
Buzzer/Strobe	
.....CFA Series	9
Pull Cord Switches	
.....CFA Series	10
Dome Stations	
.....CFA Series	12

Call for Assistance Kits



CFA Series

Features and Specifications

- 6538-G5 (Clear Lens Kit) includes 6536-G5 Horn/Strobe, 592 Transformer and 6537 Pull Cord Switch
- Double pole single throw switch
- Neutral white color
- Fits single gang box
- UL 1638 listed - Horn/Strobe

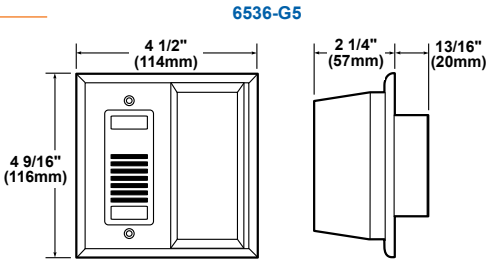

NOTE: Colored lenses are for reference only and are not available for lens replacement purposes.

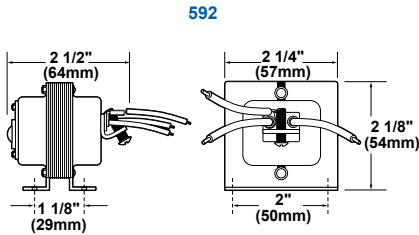

Ordering Information							
Description	Cat. No.	Transformer		Horn/Strobe Current	Lens Color	dBA at 1m/10ft.	Strobe Candela
		Primary	Secondary				
Call for Assistance Kit	6538-G5	120V AC	24V AC	0.175 A @ 24V AC ¹ 0.125 A @ 24V DC	Clear	92/82	50
	6538A-G5	120V AC	24V AC	0.175 A @ 24V AC ¹ 0.125 A @ 24V DC	Amber	92/82	40
	6538B-G5	120V AC	24V AC	0.175 A @ 24V AC ¹ 0.125 A @ 24V DC	Blue	92/82	17
	6538G-G5	120V AC	24V AC	0.175 A @ 24V AC ¹ 0.125 A @ 24V DC	Green	92/82	29
	6538R-G5	120V AC	24V AC	0.175 A @ 24V AC ¹ 0.125 A @ 24V DC	Red	92/82	25

¹AC voltage frequency is 50/60 Hz




Call for Assistance Kits


CFA Series

Features and Specifications


- 7008B-N5 (Clear Lens Kit) includes 7007B-N5 Buzzer/Strobe and 6537 Pull Cord Switch
- Double pole single throw switch
- Neutral white color
- Fits single gang box
- 68.6dB buzzer at 1 meter/59dB at 10ft.

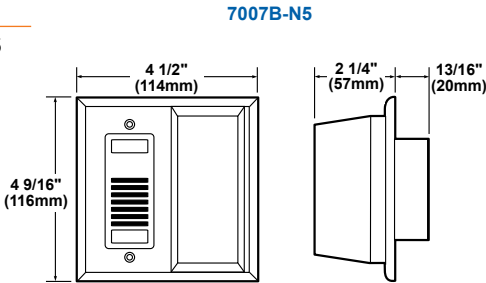

NOTE: Colored lenses are for reference only and are not available for lens replacement purposes.



Ordering Information						
Description	Cat. No.	Operating Voltage	Buzzer/Strobe Current	dBA at 1m/10ft.	Lens Color	Strobe Candela
Call for Assistance Kit	7008B-N5	120V AC	0.115 A	68.6/59	Clear	150
	7008BA-N5	120V AC	0.115 A	68.6/59	Amber	120
	7008BB-N5	120V AC	0.115 A	68.6/59	Blue	51
	7008BG-N5	120V AC	0.115 A	68.6/59	Green	86
	7008BR-N5	120V AC	0.115 A	68.6/59	Red	74




Hotel Room Annunciator


CFA Series

Features and Specifications


- 7005-G5 (Clear Lens Kit) includes 6536-G5 Horn/Strobe, 592 Transformer and 620 Push Button
- Neutral white color
- Fits single gang box
- 92dB buzzer at 1 meter/82dB at 10ft.
- UL 1638 listed - Horn/Strobe

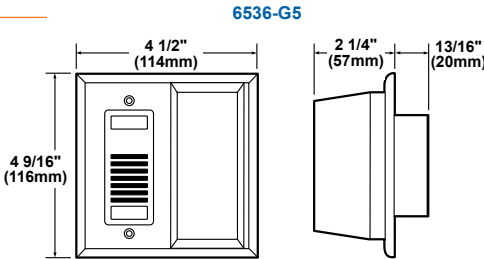

NOTE: Colored lenses are for reference only and are not available for lens replacement purposes.

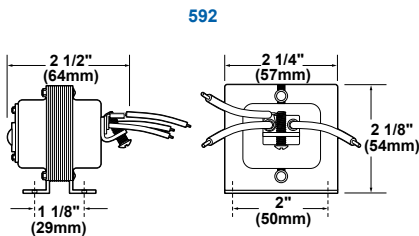

147-10 with 620 Pushbutton



Ordering Information							
Description	Cat. No.	Transformer		Horn/Strobe Current	Lens Color	dBA at 1m/10ft.	Strobe Candela
		Primary	Secondary				
Call for Assistance Kit	7005-G5	120V AC	24V AC	0.175 A @ 24V AC ¹ 0.125 A @ 24V DC	Clear	92/82	50
	7005A-G5	120V AC	24V AC	0.175 A @ 24V AC ¹ 0.125 A @ 24V DC	Amber	92/82	40
	7005B-G5	120V AC	24V AC	0.175 A @ 24V AC ¹ 0.125 A @ 24V DC	Blue	92/82	17
	7005G-G5	120V AC	24V AC	0.175 A @ 24V AC ¹ 0.125 A @ 24V DC	Green	92/82	29
	7005R-G5	120V AC	24V AC	0.175 A @ 24V AC ¹ 0.125 A @ 24V DC	Red	92/82	25

¹AC voltage frequency is 50/60 Hz




Push Buttons

Push Button Plate

147 Series

Features and Specifications

- Used as a switch plate outside hotel rooms accessible to the hearing impaired
- Stainless steel faceplate
- Suitable for use with 620 Series push button
- Supplied as part of the 7005-G5 Hotel Room Annunciator

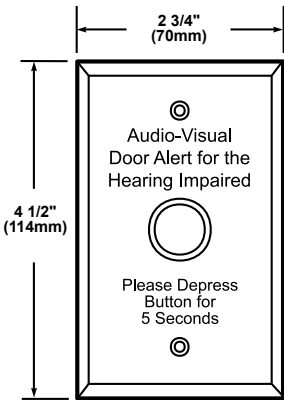


NOTE: Shown with 620 push button, not included.

Ordering Information		
Description	Cat. No.	For Use With
Single Gang Push Button Plate	147-10	7005-G5 Hotel Room Annunciator Kit

Features and Specifications

- Standard switch box mounting
- Stainless steel faceplate

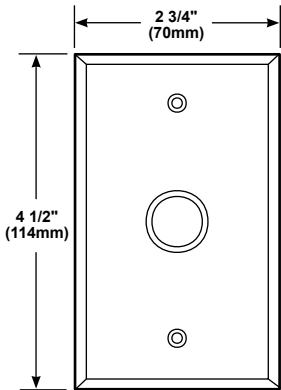

Ordering Information		
Description	Cat. No.	For Use With
Mounting Plate for 5/8" Push Buttons	147-1	620 and 690 Series


CALL FOR ASSISTANCE

Horn/Strobe

CFA Series

Features and Specifications

- Neutral white color
- 92dB at 1 meter/82dB at 10 ft.
- UL 1638 listed

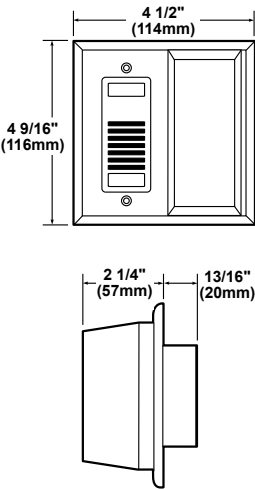

NOTE: Colored lenses are for reference only and are not available for lens replacement purposes.

Ordering Information						
Description	Cat. No.	Operating Voltage	Current	Lens Color	dB at 1m/10ft.	Strobe Candela
Horn/Strobe	6536-G5	24V AC	0.175 A @ 24V AC ¹	Clear	92/82	50
		24V DC	0.125 A @ 24V DC			
	6536A-G5	24V AC	0.175 A @ 24V AC ¹	Amber	92/82	40
		24V DC	0.125 A @ 24V DC			
	6536B-G5	24V AC	0.175 A @ 24V AC ¹	Blue	92/82	17
		24V DC	0.125 A @ 24V DC			
	6536G-G5	24V AC	0.175 A @ 24V AC ¹	Green	92/82	29
		24V DC	0.125 A @ 24V DC			
	6536R-G5	24V AC	0.175 A @ 24V AC ¹	Red	92/82	25
		24V DC	0.125 A @ 24V DC			

¹AC voltage frequency is 50/60 Hz

CALL FOR ASSISTANCE




Buzzer/Strobe

CFA Series

Features and Specifications


- Neutral white color
- 68.6dB at 1 meter/59dB at 10 ft.

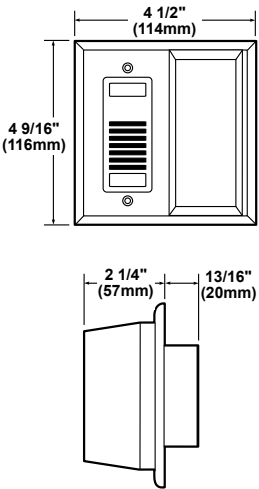

NOTE: Colored lenses are for reference only and are not available for lens replacement purposes.

Ordering Information						
Description	Cat. No.	Operating Voltage	Current	Lens Color	dB at 1m/10ft.	Strobe Candela
Buzzer/Strobe	7007B-N5	120V AC	0.115 A	Clear	68.6/59	150
	7007BA-N5	120V AC	0.115 A	Amber	68.6/59	120
	7007BB-N5	120V AC	0.115 A	Blue	68.6/59	51
	7007BG-N5	120V AC	0.115 A	Green	68.6/59	86
	7007BR-N5	120V AC	0.115 A	Red	68.6/59	74

CALL FOR ASSISTANCE




Pull Cord Switches

CFA Series

Features and Specifications

- Double pole single throw switch
- Stainless steel faceplate
- 10 foot cord length
- Replacement cords user supplied

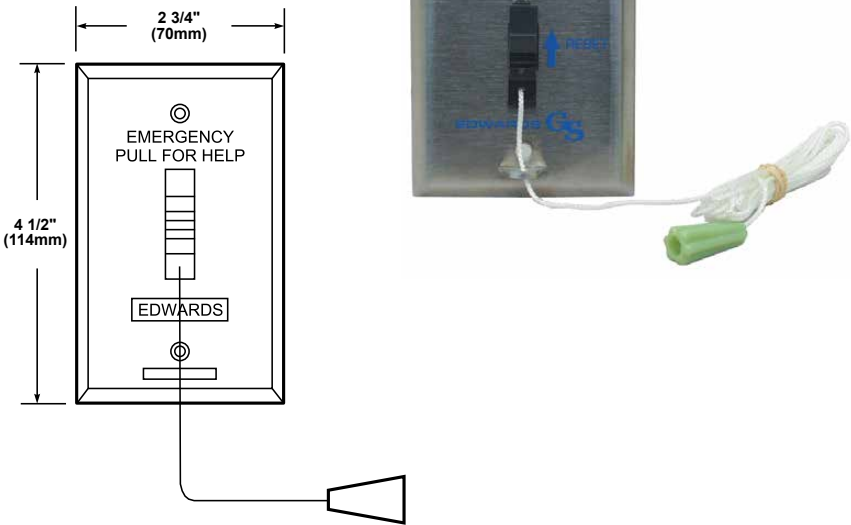

Ordering Information			
Description	Cat. No.	Operating Voltage	Current
Pull Cord Switch	6537	125V AC	3 A
		125V DC	0.5 A

CALL FOR ASSISTANCE




Pull Cord Switches

CFA Series

Features and Specifications

- 3 maintained contacts
- Stainless steel faceplate
- "Emergency" engraved units available
- Flush or surface mount
- Replacement cords user supplied

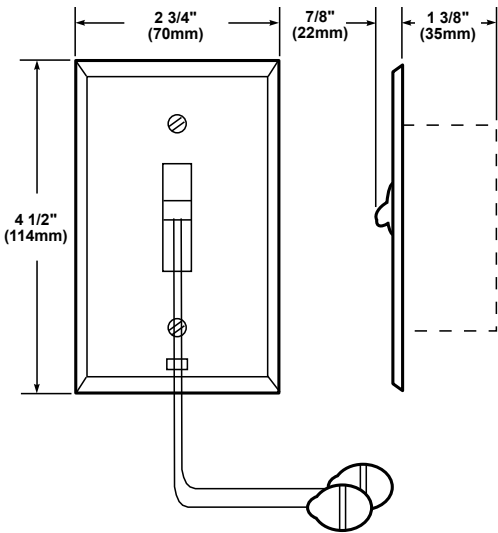

Ordering Information			
Description	Cat. No.	Operating Voltage	Current
Pull Cord Switch, Blank	7302A	125V AC	3 A
		125V DC	0.5 A
Pull Cord Switch, Engraved "Emergency"	7302AE	125V AC	3 A
		125V DC	0.5 A

CALL FOR ASSISTANCE





Dome Stations

CFA Series

Features and Specifications

- Available with 1, 2 or 4 lamps
- Stainless steel faceplate
- White or red dome



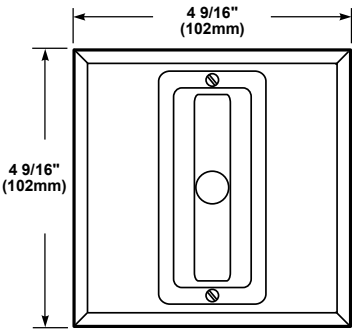


Ordering Information						
Description	Cat. No.	Operating Voltage	VA Per Lamp	Dome Color	Replacement	
					Dome	Lamp - Clear/Red
1 Lamp Station white lamp	7641-1G5	24V AC	5.0	White	P-047047-0006	Industry Trade No. 313' / –
	7641-1N5	120V AC	6.0	White	P-047047-0006	Industry Trade No. 6S6' / –
2 Lamp Station 1 white, 1 red	7641-2G5	24V AC	5.0	White	P-047047-0006	Industry Trade No. 313' / P-036350-0001 (24V)
	7641-2N5	120V AC	6.0	White	P-047047-0006	Industry Trade No. 6S6' / P-008636-0001 (120V)
4 Lamp Station 2 white, 2 red	7641-4G5	24V AC	5.0	White	P-047047-0006	Industry Trade No. 313' / P-036350-0001 (24V)
1 Lamp Station white lamp	7641R-1G5	24V AC	5.0	Red	P-047047-0008	Industry Trade No. 313' / –
	7641R-1N5	120V AC	6.0	Red	P-047047-0008	Industry Trade No. 6S6' / –

¹User supplied



Other SMARTER SIGNALING™ Solutions



Edwards Signaling is a division
of Kidde, a Carrier Company.
1016 Corporate Park Drive
Mebane, NC 27302